


# TECHNICAL DATA SHEET

## STAR.T

### with head for ALUMINIUM joist

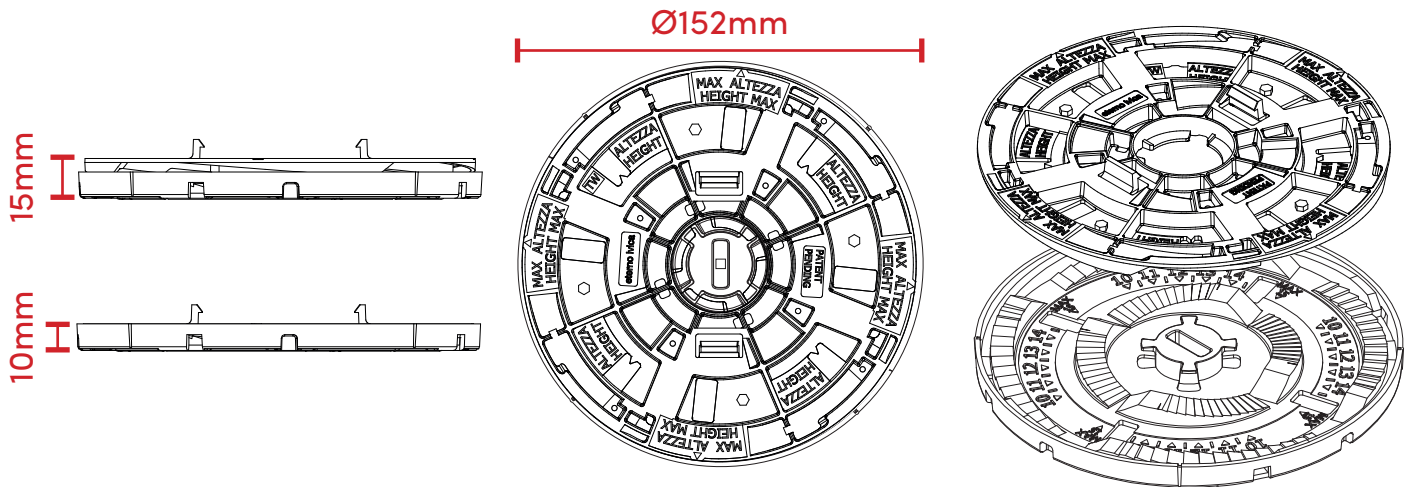

#### TECHNICAL SPECIFICATION

Supply and installation of supports for raised floors "STAR.T with head for ALUMINIUM joist".

The supports are composed of two polypropylene elements with a diameter of 152mm and with an adjustable height from 10mm up to 15mm, at the top there are 2 clips to allow the attachment of the aluminum joist on the body of the support.

In the base there are holes for the outflow of water. There are housings for various accessories and a hole for the adjustment key.

By using the special STAR.T extension, it is possible to reach a maximum height of 30mm.

#### CHARACTERISTICS:

- Minimum height 8mm with only upper body used
- Minimum height with also using the base 10mm
- Height adjustable up to 15mm
- Prepared for use with extensions having a height of 5mm
- Holes for water drainage
- Hole for inserting adjustment wrench
- Slot for inserting joists compatibility accessories
- Aluminum joists compatibility

#### RAW MATERIAL:

Polypropylene

#### ENVIRONMENTAL IMPACT:

recyclable material - not dangerous

#### APPLICATIONS SURFACES:

- On any waterproofing membrane
- On any insulating hard panel
- On any compact and solid surface

#### APPLICATIONS AREA:

Can be used with any prefabricated self supporting element for outdoor flooring

### GENERAL CHARACTERISTICS & PROPERTIES

	UNIT	VALUE	TOLERANCE +/-
<b>BASE DIAMETER</b>	mm	152	+/- 1.0
<b>BASE THICKNESS</b>	mm	2	+/- 0.2
<b>SURFACE OF THE BASE</b>	cmq	182	+/- 5
<b>CLIPS HEIGHT</b>	mm	7.2	+/- 0.2
<b>SHORE</b>	Shore d	70	+/- 3



# TECHNICAL DATA SHEET

## STAR.T

### with head for ALUMINIUM joist



#### ITEMS CHARACTERISTICS & PROPERTIES

STAR.T_AL_E003011515	UNIT	VALUE	TOLERANCE	PACK/STORAGE	
min HEIGHT	mm	10	+/- 1,0	PIECES PER BOX	90
MAX HEIGHT	mm	15	+/- 1,0	BOXES PER PALLET	60
WEIGHT	kg	0.089	+/- 5 %	BOX DIMENSION	39x39x24cm
MAX CENTRAL COMPRESSION RESISTANCE*	kN	35.53	/	BOX WEIGHT	9.2kg
				PALLET	80x120cm
				PCS PER PALLET	5400

\*Tests made by Civil and Environmental Department of University of Padova. 1 kN = 102 kg

The packaging of the supports consists of cardboard boxes. The final packaging of the pallets is made with the wrapping of a polyethylene film. Indoor storage, protected from precipitation, is recommended.

**INSTALLATION METHOD:** The product is laid dry, without the need for adhesives or other types of fixings.

The above data are relevant to current production and may be changed or updated by Eterno Ivica at any time without notice. Given the many possible uses and the possible interference of external elements, we do not assume responsibility for the results. The buyer is required to establish under their own responsibility the suitability of the product for the intended use. This document is property of Eterno Ivica. All rights reserved.